

Catalog 4190-HPRV

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



ENGINEERING YOUR SUCCESS.

Contents

High pressure relief valve

Page 3 Introduction - High Pressure

Page 4 Seal & Spring Options

Page 5 Dimensions

Page 6 Materials of Construction

Low pressure relief valve

Page 7 Introduction - Low Pressure

Page 8 Seal & Spring Options

Page 9 Dimensions

Page 10 Materials of Construction

Page 11 How to Order



WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries or its authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Introduction: High Pressure Relief Valve

The Parker High Pressure Relief Valve (HPRV) provides an automatic protection mechanism for process instrumentation systems. When upstream pressure exceeds the closing force exerted by the valve's spring, the lower stem opens and permits flow through the valve's outlet port - which can be ducted to a safe place or released to atmosphere. Flow rate increases proportionately to the increase in upstream pressure.

CE marked and certified to the highest Category-IV level of the Pressure Equipment Directive (PED), the HPRV valve's design provides users with accurate and consistent cracking and resealing operation. The valve's innovative seat design additionally operates over an extremely wide pressure range (150 to 6000 psi, 10.3 to 414 bar), providing a universal solution for the vast majority of instrumentation applications.

Pressure settings are externally adjustable. Eight different spring ranges provide greater system sensitivity and enhanced performance.



Features

- **Captured moulded seat design is blow-out and chip resistant**
- **Colour coded springs and labels indicate spring cracking range**
- **Unique Tru-loc™ facility prevents accidental adjustment**
- **Lock wire feature secures a given pressure setting**
- **Low friction stem seal design prevents friction which increases accuracy of cracking pressure and reseal pressure**
- **Balanced poppet design ensures consistent cracking pressure regardless of system back pressure**
- **Orifice size: 3.6mm (0.142")**
- **Multiple end connections available**

Specifications

Working Pressure

Maximum Cold Working Pressure: 6000 psi (414 bar).
Up to 8000 psi (552 bar) during relief with no internal seal damage. Maximum back pressure: 2000 psi (137.9 bar).

Cracking Pressure

Eight springs, from 150 psi to 6000 psi in the following ranges: 150-375 psi, 325-775 psi, 725-1525 psi, 1475-2275 psi, 2225-3025 psi, 2975-4025 psi, 3975-5025 psi, 4975-6000 psi.

(See table on page 4 for bar equivalents).

Cracking pressure within 3% of set pressure.
Reseat pressure within 15% of cracking pressure.

Note: Valves which are not actuated for a period of time may initially crack at higher than set pressures.


Maximum Relieving Flow

Water 1.686 l/min @ 150 psi with zero back pressure.
Nitrogen 313 l/min @ 150 psi with zero back pressure.

Note: For a 'safe' system the relieving flow capacity should exceed the maximum input flow. The maximum discharge capacity is not a given design specification for this valve, therefore the maximum discharge capacity quoted within the instructions is for informative purposes only. Should this guideline value not be sufficient to protect equipment or systems from exceeding maximum pressure, another type of relief or safety valve should be used.

HPRV (High Pressure)

Seal & Spring Options

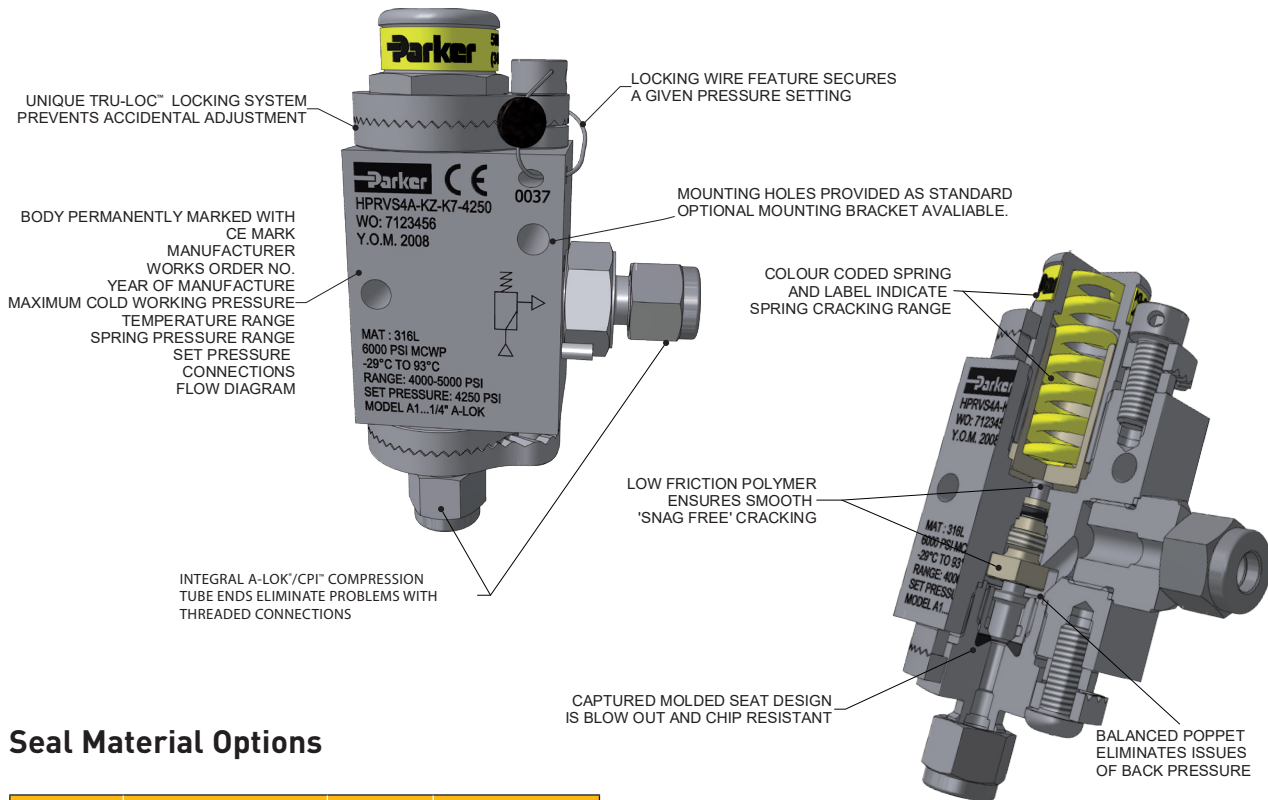


Seal Material Options


Designator	Material	Shore Hardness	Temperature Range
V	Fluorocarbon Rubber	90	-23°C to +204°C (-10°F to +400°F)
EPR	Ethylene Propylene Rubber	90	-57°C to +135°C (-70°F to +135°F)
BN	Nitrile Rubber (Buna-N)	90	-34°C to +107°C (-30°F to +225°F)
KZ	Highly Fluorinated Fluorocarbon Rubber	90	-29°C to +93°C (-20°F to +200°F)
NE	Neoprene Rubber	70	-43°C to +121°C (-45°F to +250°F)

Available End Connections

Z - Single ferrule CPI™ compression port




A - Two ferrule A-LOK® compression port




Spring Cracking Pressures

Designator	Pressure Range		Colour Code
	psi	bar	
K1	150-375	10.3-25.9	Grey
K2	325-775	22.4-53.4	Red
K3	725-1525	50.0-105.1	Orange
K4	1475-2275	101.7-156.9	Yellow
K5	2225-3025	153.4-208.6	Light Green
K6	2975-4025	205.1-277.5	Light Blue
K7	3975-5025	274.1-346.5	Violet
K8	4975-6000	343.0-414.0	Lemon Yellow

M - ANSI/ASME B1.20.1 External pipe threads







F - ANSI/ASME B1.20.1 Internal pipe threads



HPRV (High Pressure)

Dimensions

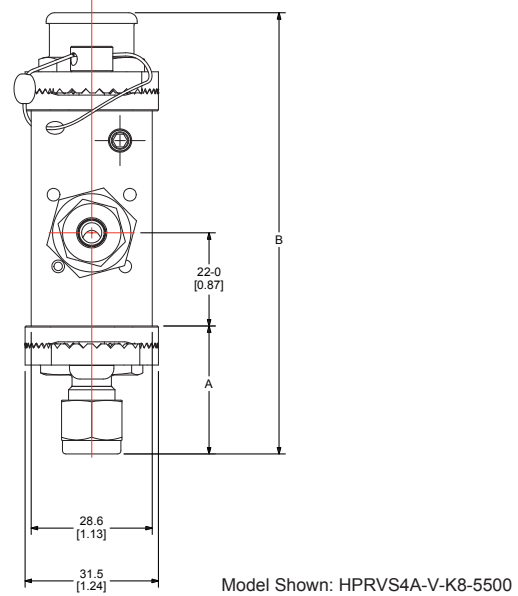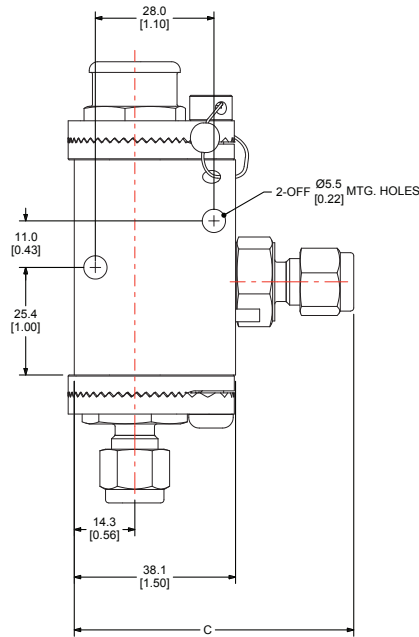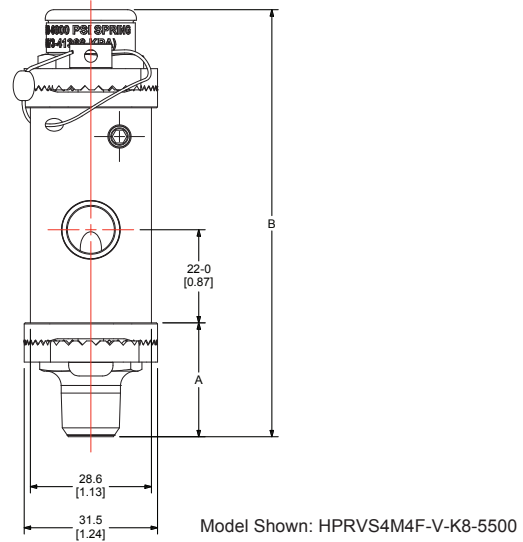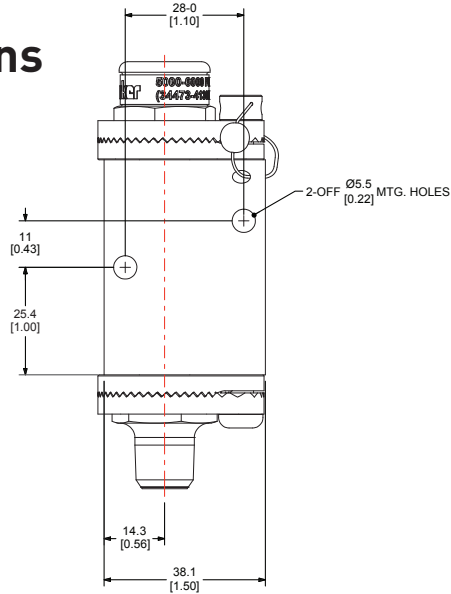


Basic Part Number	End Connections		Flow Data				Dimensions					
	Inlet	Outlet	Outlet		CV	X _r	A		B		C	
			mm	inch			mm	inch	mm	inch	mm	inch
HPRV_4A	1/4" O.D. A-LOK™	1/4" O.D. A-LOK™	3.6	0.14	0.41	0.67	27.2	1.07	105.8	4.17	63.5	2.50
HPRV_4Z	1/4" O.D. CPI™	1/4" O.D. CPI™					27.2	1.07	105.8	4.17	63.5	2.50
HPRV_M6A	6mm O.D. A-LOK™	6mm O.D. A-LOK™					27.2	1.07	105.8	4.17	63.5	2.50
HPRV_M6Z	6mm O.D. CPI™	6mm O.D. CPI™					27.2	1.07	105.8	4.17	63.5	2.50
HPRV_4M4F	1/4-18 NPT (male)	1/4-18 NPT (Female)					26.9	1.06	105	4.13	NA	

For A-LOK™ and CPI™, dimensions are measured with nuts in the finger tight position
Gas flow will be choked when $P_1 - P_2 / P_1 = X_T$

[x] denotes dimensions in inches

HPRV (High Pressure)

Materials of Construction

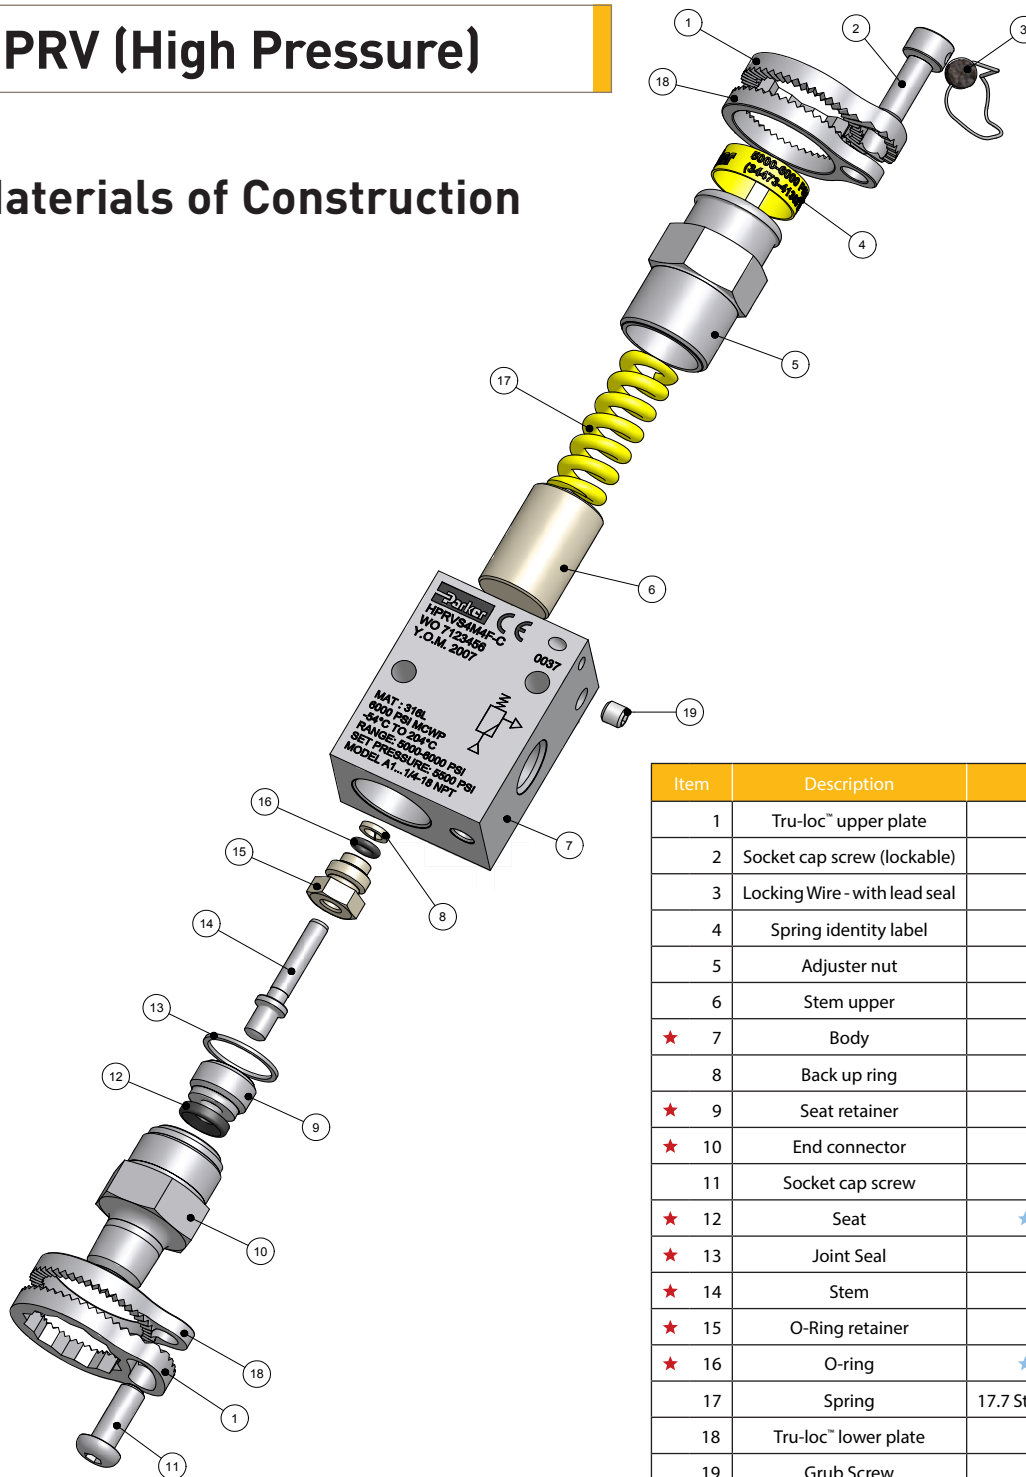

Item	Description	Material
1	Tru-loc™ upper plate	316 Stainless Steel
2	Socket cap screw (lockable)	316 Stainless Steel
3	Locking Wire - with lead seal	316 Stainless Steel
4	Spring identity label	Vinyl
5	Adjuster nut	ASTM A 479 type 316
6	Stem upper	PEEK
★ 7	Body	ASTM A 479 type 316
8	Back up ring	PTFE
★ 9	Seat retainer	ASTM A 479 type 316
★ 10	End connector	ASTM A 479 type 316
11	Socket cap screw	316 Stainless Steel
★ 12	Seat	★ Fluorocarbon Rubber
★ 13	Joint Seal	ASTM A 479 type 316
★ 14	Stem	ASTM A 479 type 316
★ 15	O-Ring retainer	PEEK
★ 16	O-ring	★ Fluorocarbon Rubber
17	Spring	17.7 Stainless Steel (Colour Coded)
18	Tru-loc™ lower plate	316 Stainless Steel
19	Grub Screw	316 Stainless Steel

★ Wetted parts.

★ Optional seat and seal materials are located in How to Order section.

Declaration of PED Compliance


This relief valve conforms to the Pressure Equipment Directive 97/23/EC, Safety Accessories / Category IV, as per article 1 section 2.1.3. CE 0037. All valves are CE marked and supplied with a full declaration of conformity. Parker Hannifin has been audited by Zurich Risk Services and meets the requirements of assessment procedure module H1 and awarded an EC Design Examination Certificate EN – 044020/B1.

These valves also conform to Directive 94/9/EC relating to equipment intended for use in potentially explosive atmospheres and is ATEX certified.

Introduction: Low Pressure Relief Valve

The Parker Low Pressure Relief Valve provides an automatic protection mechanism for process instrumentation systems. When upstream pressure exceeds the closing force exerted by the valve's spring, the lower stem opens and permits flow through the valve's outlet port - which can be ducted to a safe place or released to atmosphere. Flow rate increases proportionately to the increase in upstream pressure.

CE marked and certified to the highest Category-IV level of the Pressure Equipment Directive (PED), the valve's design provides users with accurate and consistent cracking and resealing operation.

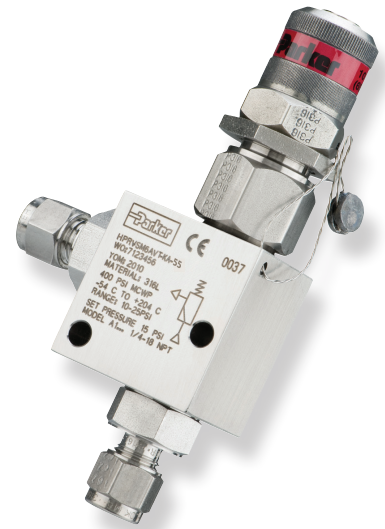

Features

- Pressure settings are externally adjustable. Six different spring ranges provide greater system sensitivity and enhanced performance
- Colour coded springs and labels indicate spring cracking range
- Lock wire feature secures a given pressure setting
- Back pressure has minimum effect on cracking pressure
- Orifice size: 5.2mm (0.203")
- Multiple end connections available

Specifications

Working Pressure

Maximum Cold Working Pressure: 400 psi (27.6 bar).
Up to 600 psi (41 bar) during relief with no internal seal damage.

Cracking Pressure

Four springs, from 50 psi to 400 psi in the following ranges: 50-100 psi (3.4-6.9 bar); 100-150 psi (6.9-10.3 bar); 150-225 psi (10.3-15.5 bar); 225-400 psi (15.5-27.6 bar).

Cracking pressure within 3% of set pressure.
Reseat pressure within 15% of cracking pressure.

Note: Valves which are not actuated for a period of time may initially crack at higher than set pressures.


Maximum Relieving Flow

Water 2.4l/min @ 10 psi set pressure with zero back pressure. Nitrogen 6.8 l/min @ 10 psi set pressure with zero back pressure. Both at ambient temperature.

Note: For a 'safe' system the relieving flow capacity should exceed the maximum input flow. The maximum discharge capacity is not a given design specification for this valve, therefore the maximum discharge capacity quoted within the instructions is for informative purposes only. Should this guideline value not be sufficient to protect equipment or systems from exceeding maximum pressure, another type of relief or safety valve should be used.

HPRV (Low Pressure)

Seal & Spring Options

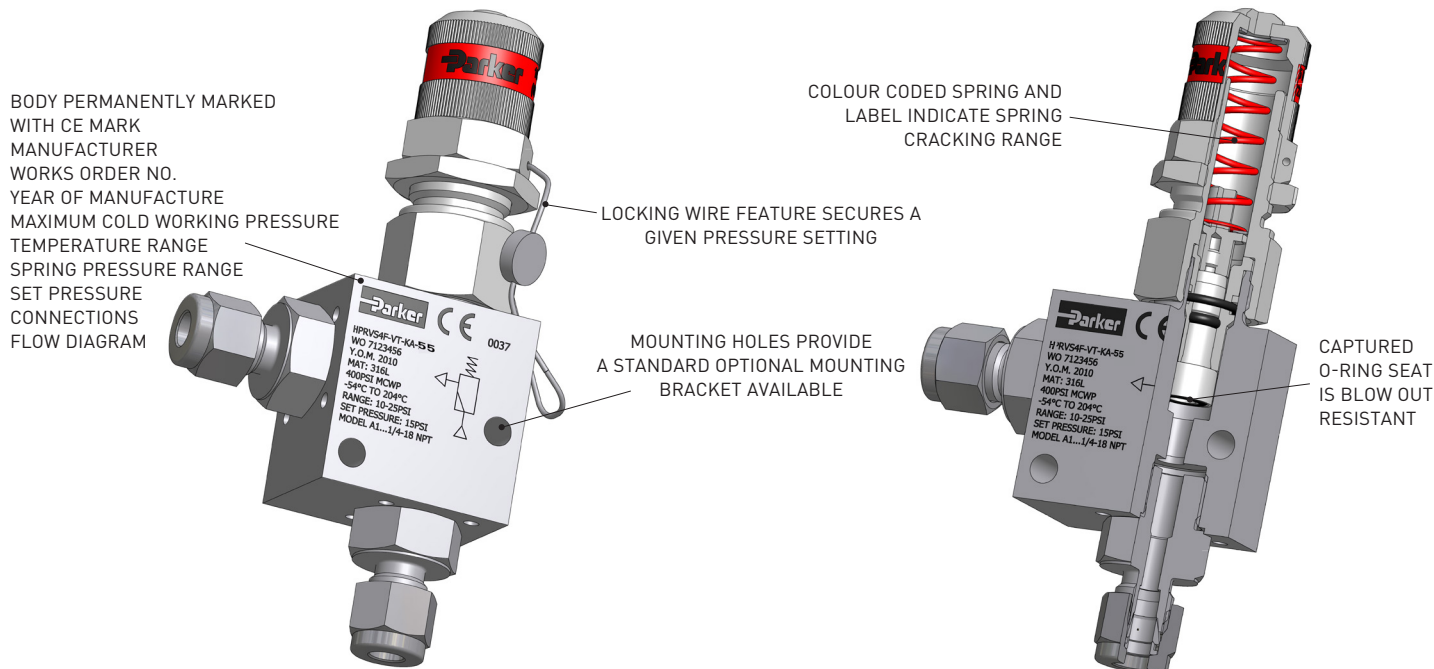


Mounting holes provided as standard. Optional mounting bracket available.

Seal Material Options


Designator	Material	Shore Hardness	Temperature Range
V	Fluorocarbon Rubber	90	-23°C to +204°C (-10°F to +400°F)
EPR	Ethylene Propylene Rubber	90	-57°C to +135°C (-70°F to +275°F)
BN	Nitrile Rubber (Buna-N)	90	-34°C to +107°C (-30°F to +225°F)
KZ	Highly Fluorinated Fluorocarbon Rubber	90	-29°C to +93°C (-20°F to +200°F)
NE	Neoprene Rubber	70	-43°C to +121°C (-45°F to +250°F)

Available End Connections

Z - Single ferrule CPI™ compression port




A - Two ferrule A-LOK® compression port




Spring Cracking Pressures

Designator	Pressure Range		Colour Code
	psi	bar	
KC	50-100	3.4-6.9	Purple
KD	100-150	6.9-10.3	Dark Green
KE	150-225	10.3-15.5	Dark Blue
KG	225-400	15.5-27.6	White


M - ANSI/ASME B1.20.1 External pipe threads



F - ANSI/ASME B1.20.1 Internal pipe threads




Dimensions

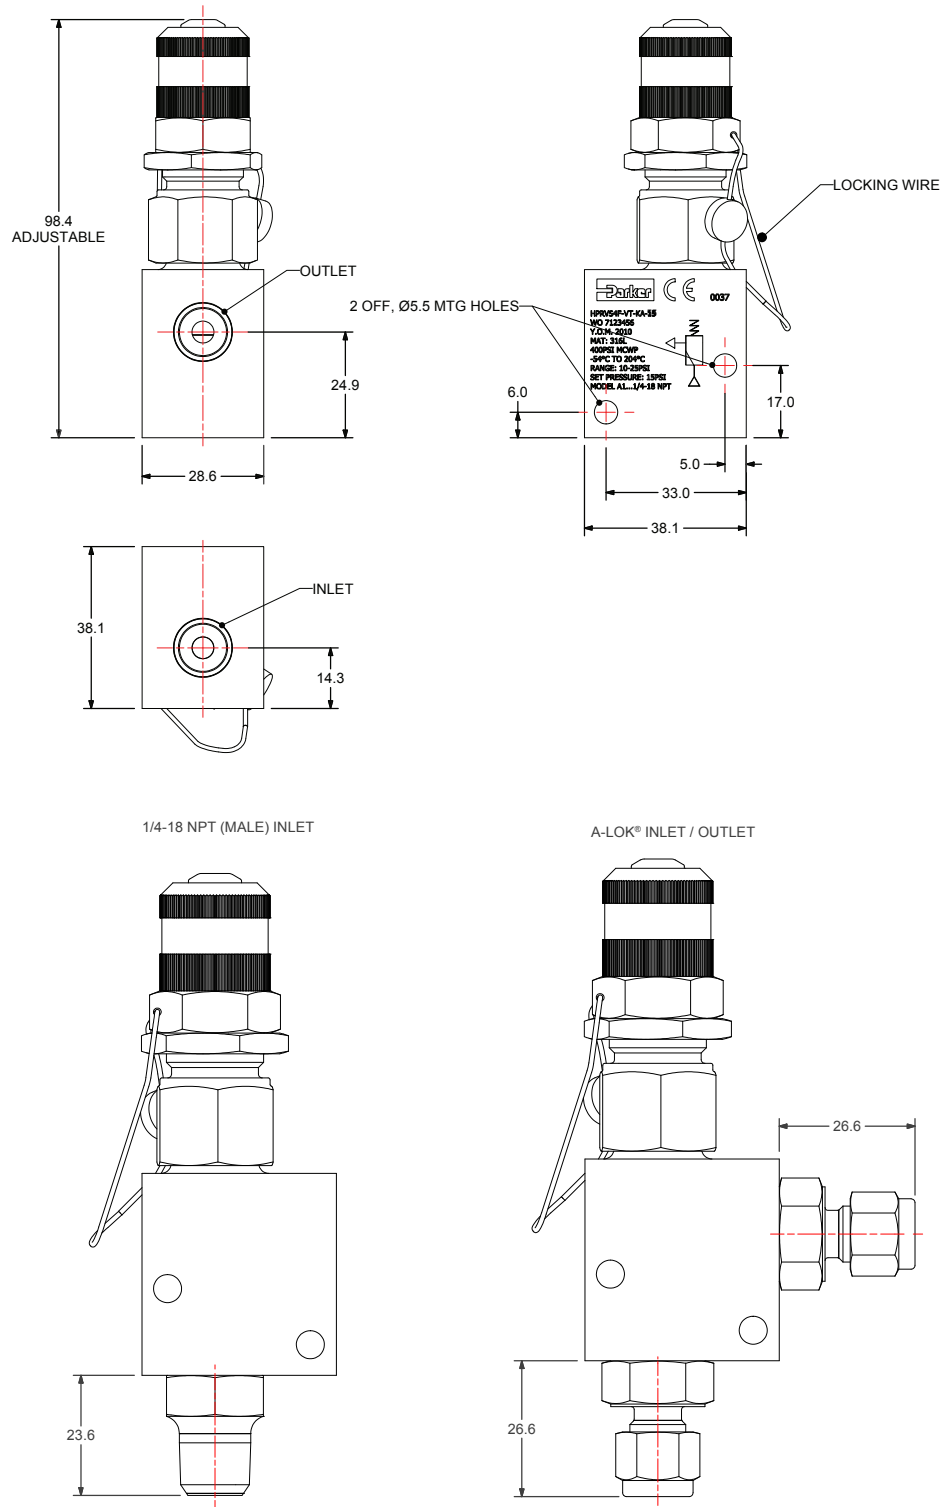

HPRV (Low Pressure)

Materials of Construction

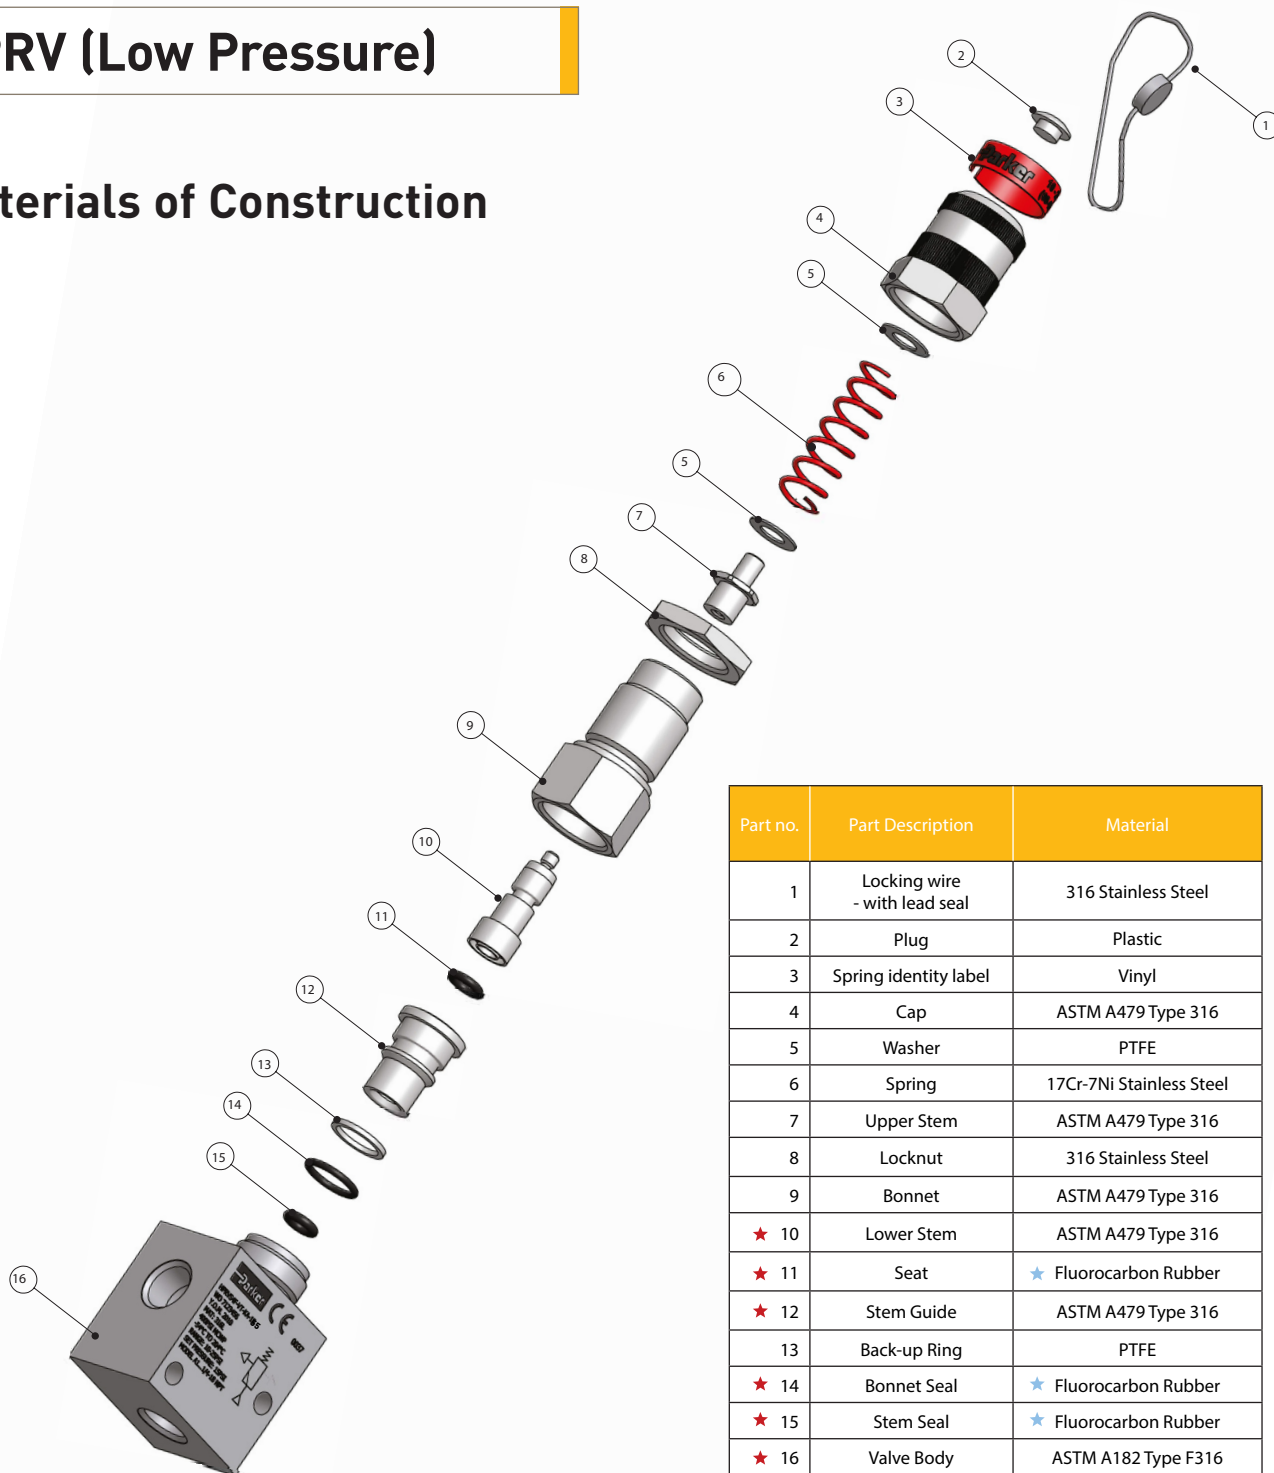

★ Optional seat and seal materials are listed in 'How To Order' section.

★ Wetted parts.


Declaration of PED Compliance

This relief valve conforms to the Pressure Equipment Directive 97/23/EC, Safety Accessories / Category IV, as per article 1 section 2.1.3. CE 0037. All valves are CE marked and supplied with a full declaration of conformity. Parker Hannifin has been audited by Zurich Risk Services and meets the requirements of assessment procedure module H1 and awarded an EC Design Examination Certificate CEN-060749/B1.

These valves also conform to Directive 94/9/EC relating to equipment intended for use in potentially explosive atmospheres and is ATEX certified.

How to Order - HPRV

The correct part number is easily derived from the following number sequence.
The seven product characteristics required are coded as shown below.

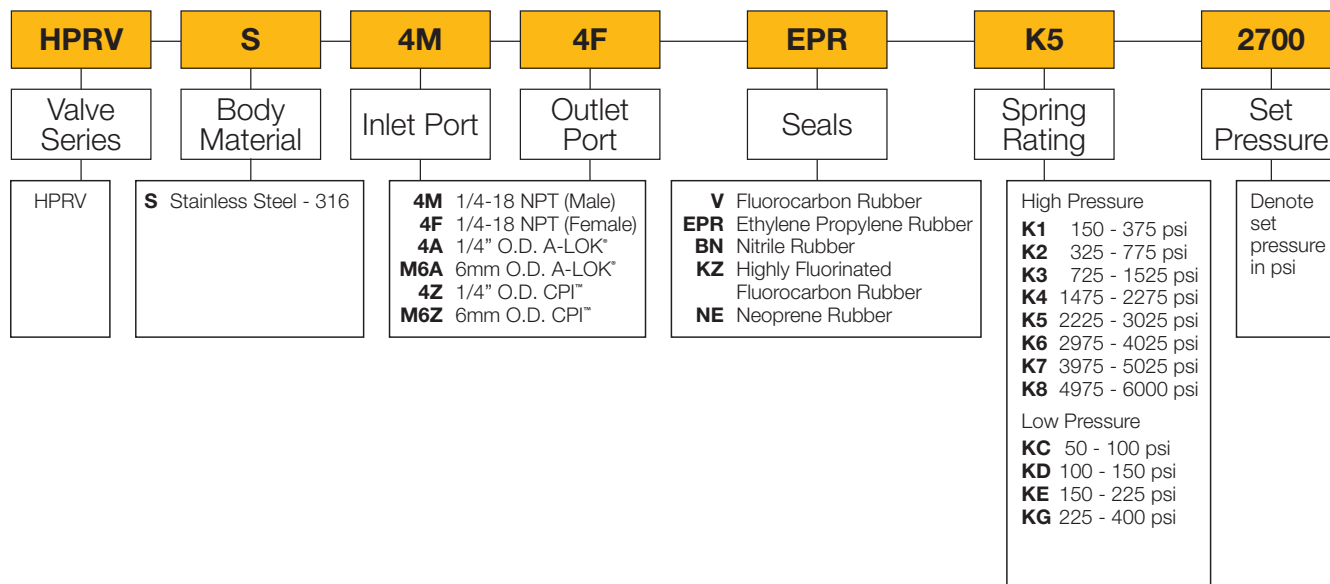

Example



Describes a HPRV Series proportional relief valve equipped with 6mm A-LOK® compression inlet and outlet ports, ethylene propylene rubber seals, stainless steel construction, fitted with a 2250 - 3000 psi spring. Supplied pre-set at 2500 psi.

Spares

The following spring and seal kits are only available for low pressure valves.

Spring Kits

Designator	Kit Part Number	Pressure Range		Colour Code
		psi	bar	
KC	KIT-RL4SP-50-100	50-100	3.4-6.9	Purple
KD	KIT-RL4SP-100-150	100-150	6.9-10.3	Dark Green
KE	KIT-RL4SP-150-225	150-225	10.3-15.5	Dark Blue
KG	KIT-RL4SP-225-400	225-400	15.5-27.6	White

Spring kit contains:
Spring; Coded label; PTFE washers;
Locking wire / lead seal; Installation instructions

Seal Kits

Seal kit order number	Seat / Seal Material
KIT - RL4 - VT	Fluorocarbon Rubber
KIT - RL4 - BNT	Nitrile Rubber
KIT - RL4 - EPRT	Ethylene Propylene Rubber
KIT - RL4 - NET	Neoprene Rubber
KIT - RL4 - KZT	Highly Fluorinated Fluorocarbon Rubber

Seal kit contains:
Stem seal; Bonnet seal; PTFE Back-Up Ring;
Lower Stem Assembly